


## 硬质合金棒材毛坯-双冷孔

### Unground Carbide Rods - 2 Coolant hole

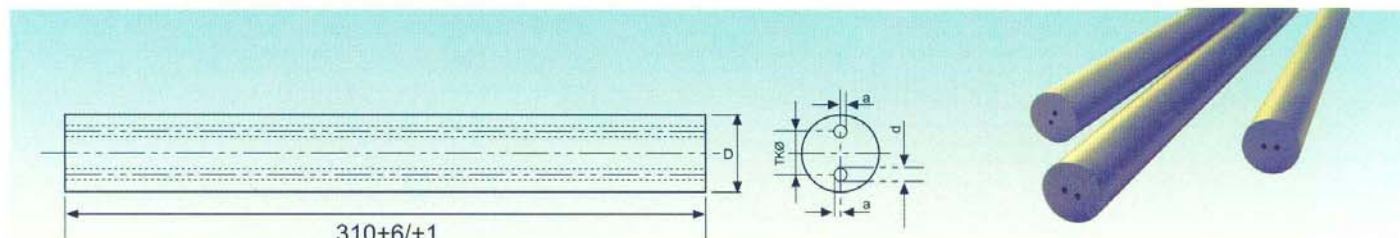

规格 Type	直径 ØD(mm)	公差 Tol.	内冷孔径 Ød(mm)	公差 Tol.	孔间距 TKØ(mm)	公差 Tol.	孔中心偏离 a
RRM 0420-3100U2S	4.0	+0.30~+0.50	0.80	±0.10	1.8	-0.15	0.10
RRM 0520-3100U2S	5.0	+0.30~+0.50	0.80	±0.10	2.0	-0.15	0.13
RRM 0630-3100U2S	6.0	+0.30~+0.50	1.00	±0.15	3.0	-0.20	0.15
RRM 0730-3100U2S	7.0	+0.30~+0.60	1.00	±0.15	3.5	-0.20	0.15
RRM 0830-3100U2S	8.0	+0.30~+0.60	1.00	±0.15	4.0	-0.30	0.15
RRM 0930-3100U2S	9.0	+0.30~+0.60	1.40	±0.15	4.0	-0.30	0.20
RRM 1030-3100U2S	10.0	+0.30~+0.60	1.40	±0.15	5.0	-0.30	0.20
RRM 1130-3100U2S	11.0	+0.30~+0.60	1.40	±0.15	5.0	-0.30	0.28
RRM 1230-3100U2S	12.0	+0.30~+0.60	1.75	±0.15	6.0	-0.30	0.30
RRM 1330-3100U2S	13.0	+0.30~+0.70	1.75	±0.15	6.0	-0.30	0.34
RRM 1430-3100U2S	14.0	+0.30~+0.70	1.75	±0.15	7.0	-0.30	0.37
RRM 1530-3100U2S	15.0	+0.30~+0.70	2.00	±0.20	7.0	-0.30	0.40
RRM 1630-3100U2S	16.0	+0.30~+0.70	2.00	±0.20	8.0	-0.30	0.40
RRM 1730-3100U2S	17.0	+0.30~+0.80	2.00	±0.20	8.0	-0.30	0.47
RRM 1830-3100U2S	18.0	+0.30~+0.80	2.00	±0.20	9.0	-0.30	0.50
RRM 1930-3100U2S	19.0	+0.30~+0.80	2.00	±0.20	9.0	-0.30	0.50
RRM 2040-3100U2S	20.0	+0.30~+0.80	2.50	±0.25	10.0	-0.40	0.50
RRM 2140-3100U2S	21.0	+0.30~+0.80	2.50	±0.25	10.0	-0.40	0.50
RRM 2240-3100U2S	22.0	+0.30~+0.80	2.50	±0.25	11.0	-0.40	0.50
RRM 2340-3100U2S	23.0	+0.30~+0.80	2.50	±0.25	11.0	-0.40	0.50
RRM 2440-3100U2S	24.0	+0.30~+0.80	3.00	±0.25	12.0	-0.50	0.50
RRM 2540-3100U2S	25.0	+0.30~+0.80	3.00	±0.25	12.0	-0.50	0.50
RRM 2640-3100U2S	26.0	+0.30~+0.80	3.00	±0.25	13.0	-0.50	0.50
RRM 2840-3100U2S	28.0	+0.30~+0.80	3.00	±0.25	14.0	-0.50	0.50
RRM 3040-3100U2S	30.0	+0.30~+0.80	3.00	±0.25	14.0	-0.50	0.50
RRM 3240-3100U2S	32.0	+0.30~+0.80	3.00	±0.25	14.0	-0.50	0.50
RRM 3440-3100U2S	34.0	+0.30~+0.80	3.00	±0.25	14.0	-0.50	0.50